


Oneida County Forest Willow West Ash

Compartment / Stand 103/7 & 8
Harvest Area: 103 Ac + 6 Ac Reserve
Legal Desc. T37N R4E Sec. 16 SESW, SWSE,
Sec. 21 E1/2SW, E1/2NW, NWNE



Tract # 21-17
Town of Lynne
Contract No.: _____
Contractor: _____
Date Sold: _____
Date Completed: _____

Contract Length: 4 Years

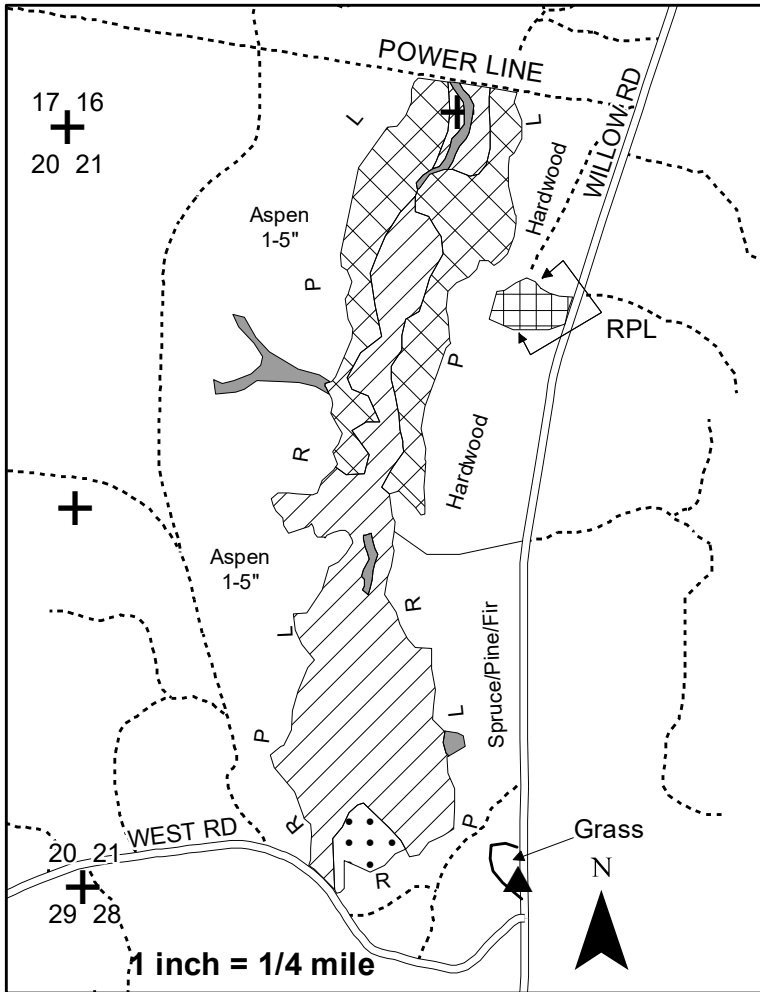

4" Top	Est. Volume	Min. Bid
Aspen	45 Tons (20 cd)	\$7.90/Ton
MX Hardwood	2585 Tons (1055 cd)	\$7.90/Ton
(MX Hardwood contains approximately 73% BI Ash, 17% Red Maple, 8% W Birch and 2% H Maple)		
Balsam Fir	310 Tons (145 Cd)	\$3.30/Ton
Tamarack/BI Spruce	105 Tons (46 Cd)	\$7.90/Ton
(95% Tamarack, 5% BI Spr)		
Sawlogs	Est. Volume	Min. Bid
Black Ash	45 MBF	\$119.00/MBF
R Maple	5 MBF	\$119.00/MBF

Legend	
	Black Ash Area: 60 Ac
	Cedar Area: 36 Ac
	Hardwood Area: 4 Ac
	Tamarack Area: 3 Ac
	Reserve Areas: 6 Ac
	RPL Red Paint Line
	Survey Corner
	GPS Control Monument
	Logging Road
	Town Road

Harvest Regulations

1. In the **Black Ash (60 Ac) and Cedar Areas (36 Ac)**, harvest only those Black Ash LARGER than 8" diameter breast height (DBH), and all Balsam Fir, Red Maple and White Birch 1" dbh and larger.

In the **Hardwood Area (4 Ac)** Harvest all maple, white birch, aspen and balsam fir except those marked with green paint.

In the **Tamarack Area (3 Ac)** Harvest all Tamarack and Black spruce except those marked with green.

Utilization on all species is a 100" stick to a 4" top. Any den or nest trees shall be left uncut. Standing dead trees are not to be cut unless they pose a safety hazard.

NO WHOLE TREE UTILIZATION.

No equipment or harvesting is allowed in the green lined areas within the black ash area. Intermittent streams are located in these areas. No slash is to be left within these areas.

2. Frozen ground conditions will be required for harvesting and hauling activities. This site is wet and will require preparation to freeze down travel lanes prior to commencing harvesting or skidding.

3. No decking or skidding is permitted on Willow Rd or West Rd or within their ditches without permission from the Town of Lynne. All landings and roads must have approval of the County prior to construction. Following completion of the sale, all trails and landings will be returned to their original condition or better. All new access roads will be bermed off or blocked with boulders at the completion of each harvest season and at completion of the sale. Bond money will not be returned until all road work is completed.

5. Slash must be pulled back a minimum of 25' from West Road and shall be cut to within 2' of the ground in this area. No other slash treatment is needed outside the 25' road zone.

6. Stump height shall not exceed 10" within the entire sale area.

7. All items listed in the Oneida County Timber Sale Contract apply. All applicable BMP's will be followed. Sale Est. PF/JR/ER 9/2017